

236
12.12

3700
1-3

FIG. 1

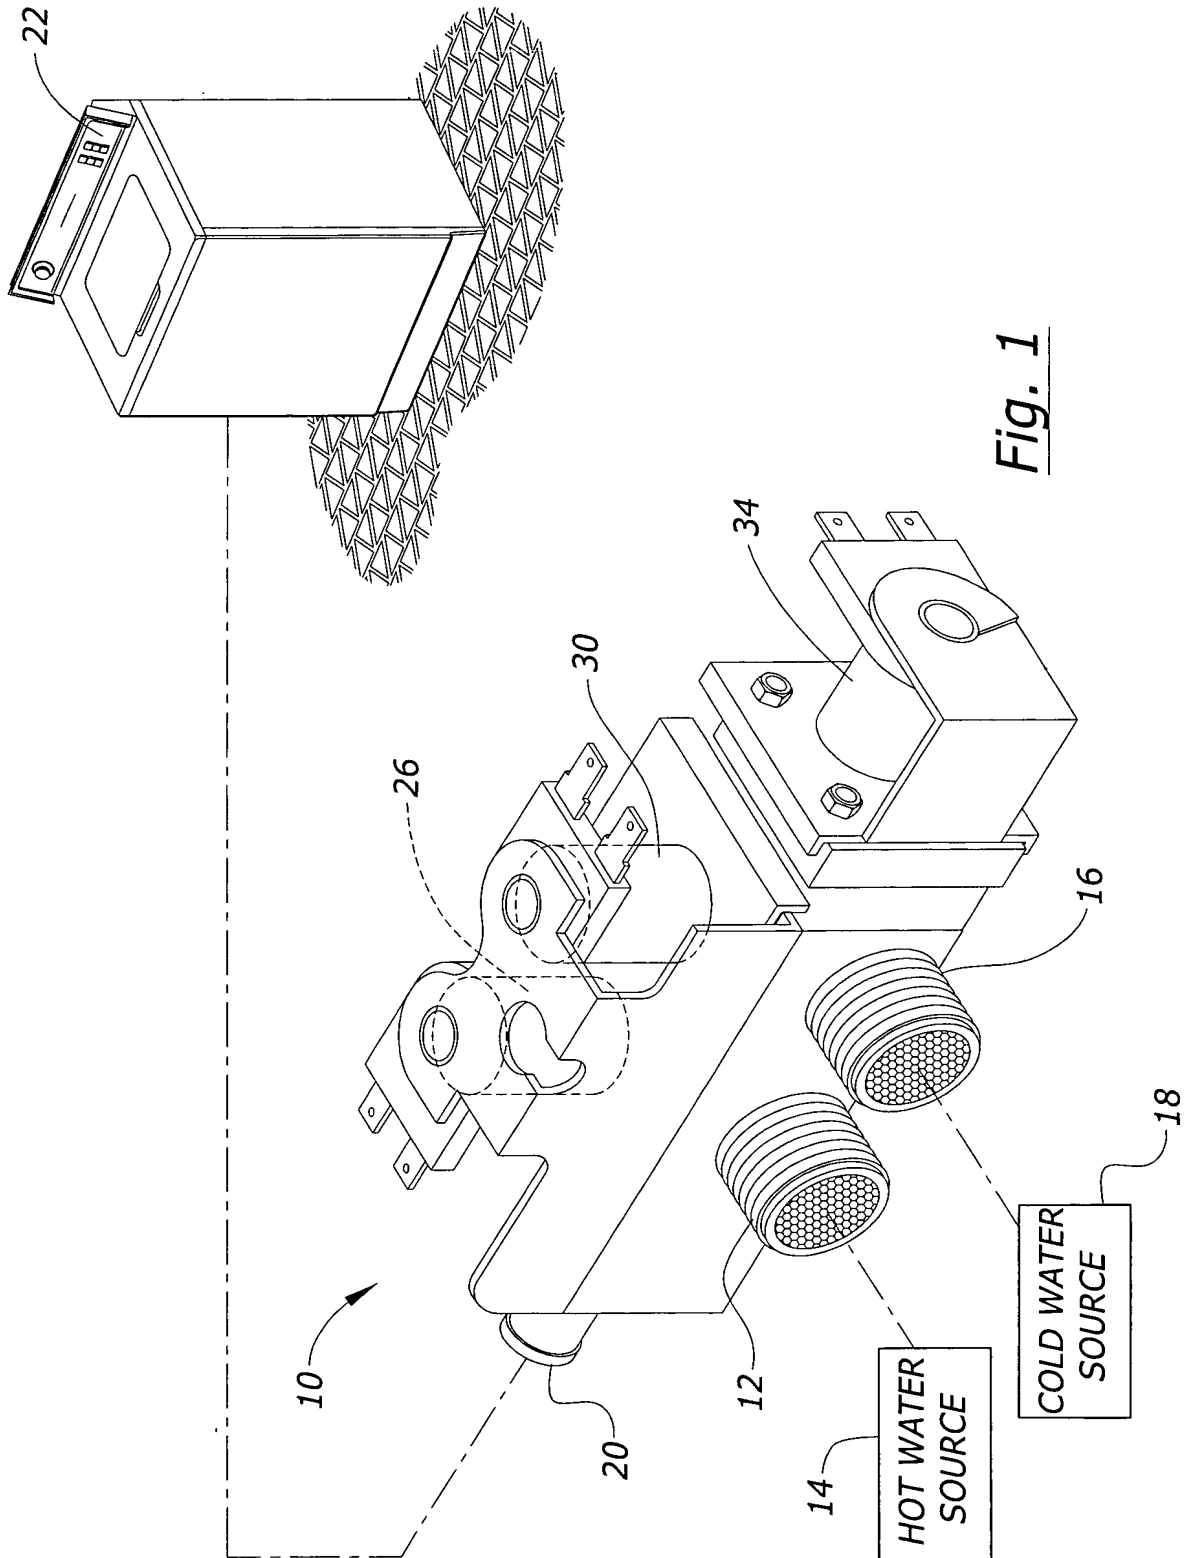


Fig. 1

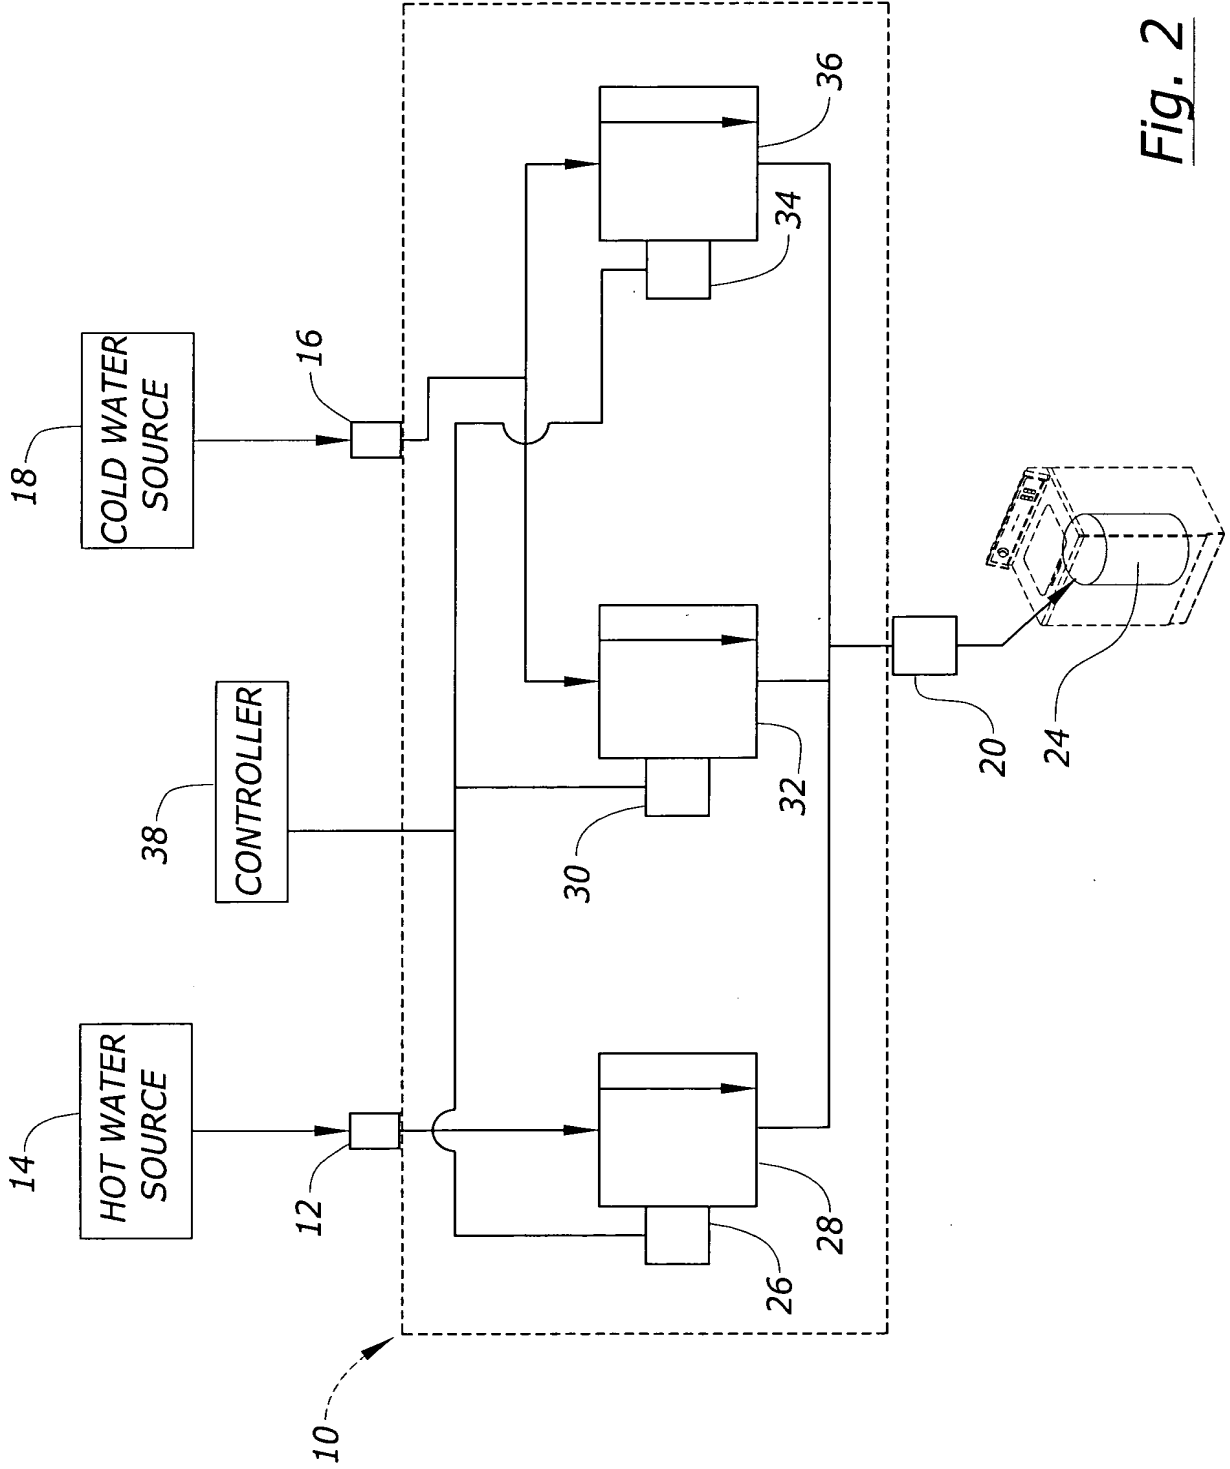


Fig. 2

FIG. 2

INLET TEMPERATURES PER STANDARD TESTING :
COLD: 60°F
HOT: 135°F

	HOT WATER VALVE 28	COLD WATER VALVE 32	LOW COLD WATER VALVE 36	OUTLET TEMPS
HOT WATER	ON	OFF	ON	115° - 120°F.
WARM WATER	ON	ON	ON	75° - 82.5°F.
COLD WATER	OFF	ON	ON	60°F.
FLOW RATE RATIOS	1	2.08 - 3.64	.25 - .36	

Fig. 3